
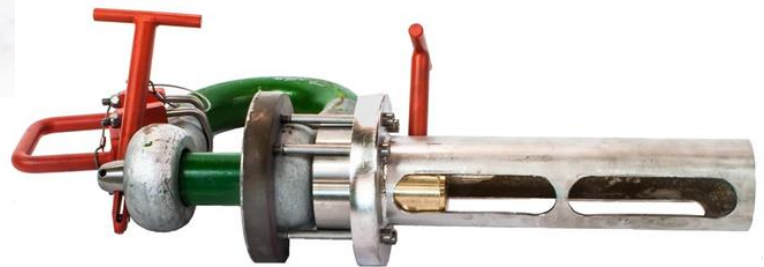


CATEGORY: Rigging & Lifting TMT ROV Shackles, 125 & 85Te

Engineered Tooling Solutions *FAST*

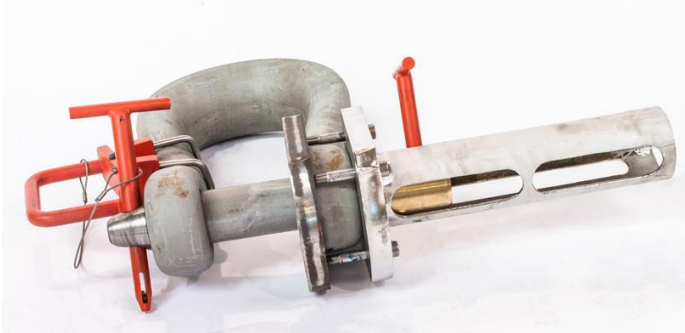

The TMT ROV friendly shackle modifications are a cost effective engineered solution to install and remove standard Green pin and sling saver shackles subsea.

The modification has a positive shackle pin guide that provides ease of operation by an ROV manipulator to engage or disengage the shackle pin. The engage pin is held in place by manipulator installation of a keeper pin with gravity operate dog to assure that the accidental disengagement of the shackle pin does not occur.

The shackle bow is not modified in our design and a simple load test is all that is required to re-certify the modified shackle assembly.

TMT modification as shown here is 85te Green Pin Safety Shackles and 125te sling saver safety shackles however our design can be modified quickly to suit shackles of higher or lower ratings.

TMT product number is:

- 125Te ROV Shackle: TMT-0013-2115
- 85Te ROV Shackle: TMT-0013-2336

Features:

- ROV positioned and operated
- Adoptive and cost effective

Specifications:

• Dimensions – 125Te	627H x 1006L x 310Wmm
• Dimensions – 85Te	475H x 1023L x 314Wmm
• Weight in Air– 125Te	125kg
• Weight in Water– 12Te	109kg
• Weight in Air – 85Te	78.4kg
• Weight in Water – 85Te	69kg
• Depth Rating	Unlimited

Specifications subject to change without notice. All rights reserved.